

## FEATURES

- NXP i.MX8M Plus with Up to Four 1.8GHz Cortex-A53 Processors
- One 800MHz Cortex-M7 for Real Time Requirements
- Gigabit Ethernet with PoE Ready (with Option PoE Add-on Board)
- Smart Codec with Dual-core DSP for Digital MICs and Voice Control
- MIPI DSI, LVDS, I<sup>2</sup>C Connectors for LCD and Touch Panel Support
- Integrated AI/ML Neural Processing Unit Accelerating ML Inferencing
- Rich I/O with Dual MIPI CSI, RS232/RS485/CAN, I<sup>2</sup>C, GPIOs, USB 3.0 Ports

The EMB-2239 embedded board is based on the NXP i.MX8M Plus ARM application processor. The board features a Power over Ethernet (PoE) ready Gigabit Ethernet port, on-board dual-core DSP that runs algorithms for voice control, a full set of I/Os including RS232/RS485/CAN, dual MIPI CSI camera interfaces and expansion header slot for PCIe, GPIO and second ethernet port, integrated AI/ML Neural Processing Unit.

## SPECIFICATIONS

### SYSTEM

<b>Processor</b>	NXP i.MX 8M Plus, 4 x ARM Cortex-A53 @ 1.8GHz, 1 x ARM Cortex-M7 @ 800MHz
<b>Platform</b>	ARM Cortex-A53
<b>Graphic Controller</b>	GC7000UL Supports OpenGL ES 1.1, 2.0, 3.0, OpenCL 1.2, Vulkan
<b>Memory</b>	On-board LPDDR4, Up to 4GB
<b>Storage</b>	On-board iNAND Flash (16GB Default), 1 x Micro SD Slot
<b>OS</b>	Yocto Embedded Linux, Amazon AVS Device SDK, Sensory TrulyHandsfree Wake Word Engine, Android 10, Debian Linux

### DISPLAY

<b>LCD Interface</b>	1 x MIPI 4-lane DSI, 1 x Dual Channel LVDS for 5", 7", 8", 10.1" and other Size LCD Panels
<b>Display Resolution</b>	LVDS - Up to 1920 x 1200p60, MIPI DSI - Up to 1920 x 1200p60 or 2 x 1080p60 + 1 x 4kp30 on HDMI

### COMMUNICATIONS

<b>Ethernet</b>	1 x GbE with <b>PoE Option</b> , Second RGMII Via Pin Header
<b>Wireless</b>	1 x WiFi / Bluetooth (AP6255/56) Module, 802.11 b/g/n/ac + Bluetooth v5.0

### POWER

<b>Power Input</b>	5V DC Via Pin Header or PoE Via RJ45 (PoE Add-on Board not Included)
--------------------	---

### I/O INTERFACE

<b>AI/ML</b>	Dedicated Neural Processing Unit (NPU): 2.3 TOPS PCIe or USB Expansion Via Pin Headers
<b>Audio</b>	1 x Mono Class D Speaker Out, @2W (4Ω), 2 (R/L) x HP Out Header, Amplified Speaker Out (R/L) @3W(4Ω)
<b>Voice Control</b>	Dual Digital MEMS Microphone Header Via CS47L24 with Dual DSP, Support Multi-mic Noise Suppression, Acoustic Echo Cancellation (AEC), Omni-directional Spatial
<b>Watchdog Timer</b>	Programmable Timer System Reset
<b>I/O Ports</b>	1 x RS232/RS485/CAN 2 x GPIO Via Terminal Block 2 x USB 2.0 or 1 x USB 3.0 Type A 2 x USB 2.0 Header 1 x USB 3.0 Type C OTG 4+ GPIO, 2 x I <sup>2</sup> C (for TP and MIPI CSI) 2 x MIPI-CSI, 2 x ISP
<b>Expansion</b>	40 pin Header with PoE Power, 2x USB 2.0, PCIe x 1, Up to 8 Channel Digital Audio Inputs or GPIOs


### MECHANICAL

<b>Form Factor</b>	Embedded Pico-ITX Standard
<b>Dimensions</b>	100 x 72mm (3.94" x 2.83")

### ENVIRONMENTAL


<b>Temperature:</b>	
- Operation	0°C to 60°C (32°F to 140°F)
- Storage	-40°C to 85°C (-40°F to 185°F)
<b>Humidity</b>	5% to 95% @ 40°C Non-condensing

## SYSTEM LAYOUT

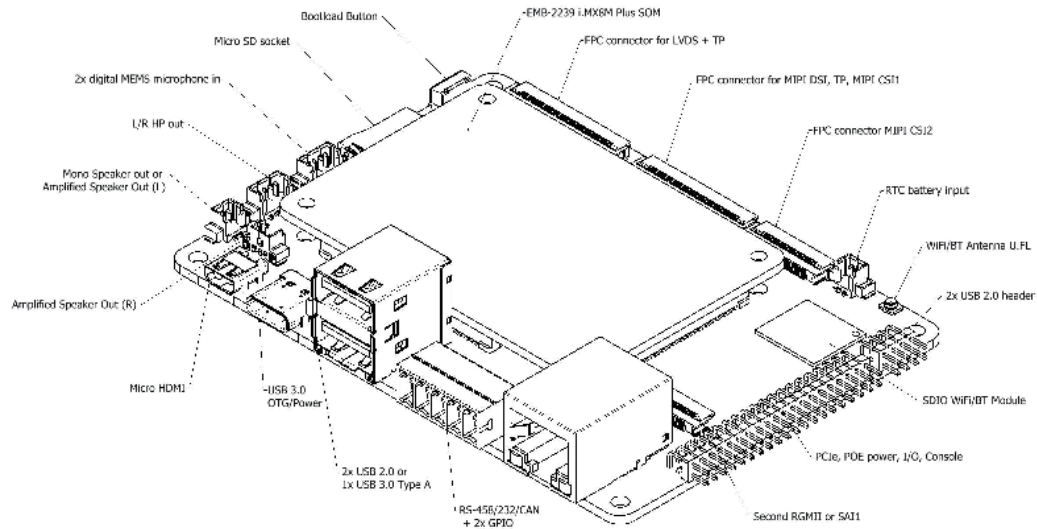

## PRODUCT DIMENSIONS

Unit: mm

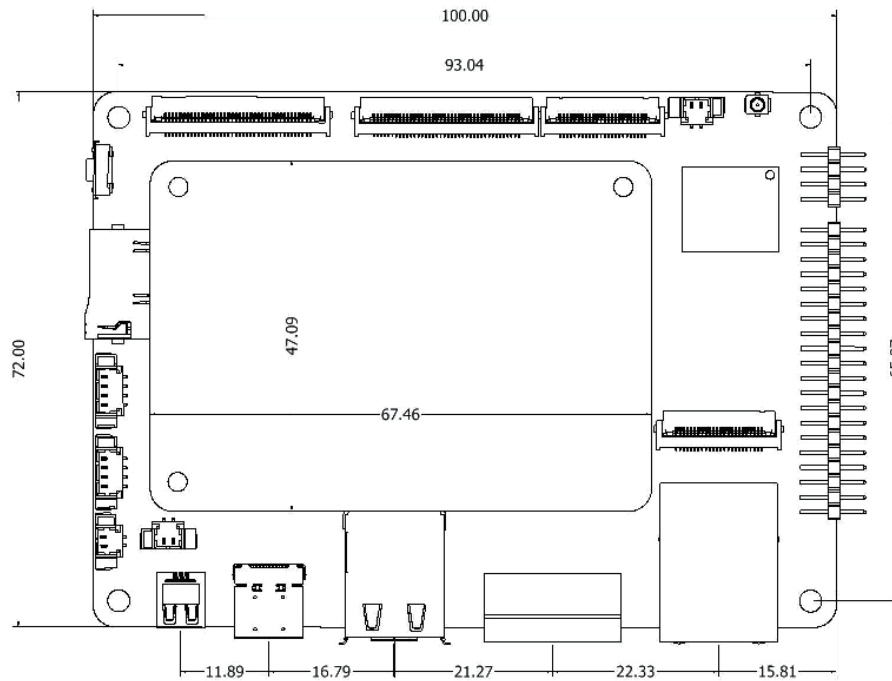

## ORDER INFORMATION

Part No.	Description
SOM-2239	NXP i.MX8M Plus SOM with Smart Coded and Ethernet
IOB-2239	IOB-2239 Carrier Board for SOM-2239
EMB-2239	SOM-2239 i.MX8M Plus SOM + IOB-2239 Carrier Board
PoE-4210	PoE Add-on Module